

# ENELTEC<sup>®</sup>

brighten your ideas

## LED High Bay Bulbs



CREE

BRIDGELUX

EPISTAR




### Specifications:

- Power: 15-120W
- Beam Angle: 120°
- Voltage: 85-265VAC
- Power Factor: >0.96
- Color: 3000K / 4500K / 6000K
- Operating temperature: -40 to + 50°C
- Material: Aluminium Alloy
- Light Degradation: < 5% in 20,000 hours
- Warranty: 3 years



- **Dimensions:**

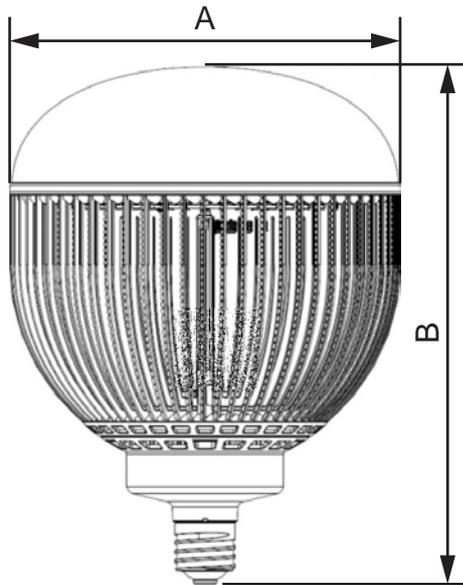


Model	Dimension (mm)	
	A	B
ENHB-15WE27-03	Φ100	148
ENHB-27WE27-03	Φ130	193
ENHB-27WE40-03	Φ130	206
ENHB-50WE40-03	Φ173	248
ENHB-60WE40-03	Φ204	277
ENHB-120WE40-03	Φ250	355

- **Installation:**


A: Replace CFL

Remove the self-ballasted CFL , and install the LED light on the lamp holder by clockwise rotating, fix the insurance rope.




B: Replace MH & HPS Light

Remove the ballast of MH & HPS Light, connect the wires to the lamp holder, install the LED light, fix the insurance rope.

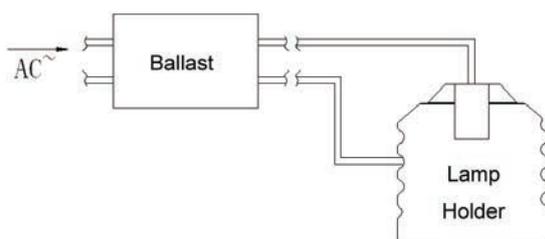

Before

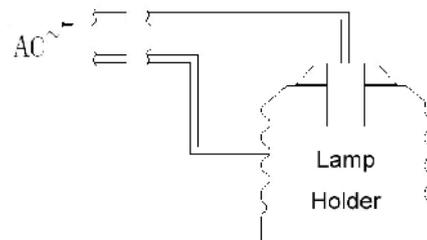

After

## ● Data:

Model	ENHB-15WE27-03	ENHB-27WE27-03 ENHB-27WE40-03	ENHB-50WE40-03	ENHB-60WE40-03	ENHB-120WE40-03
Power (W)	15	27	50	60	120
Lumen Output (LM)	1275	2295	4000	5100	10200
Input Voltage	85-265VAC 50Hz/60Hz				
Power Factor	0.96				
Power Efficiency	94%				
Beam Angle	120°				
Color	3000K / 4500K / 6000K				
CRI	Ra > 80				
Light Source Lifespan	50000h				
Working Environment	Temperature: -40°C ~ 50°C Humidity: 10% ~ 90%				
IP Rating	IP20				
Housing	Aluminium alloy				

## ● Packing:

Model	ENHB-15WE27-03	ENHB-27WE27-03 ENHB-27WE40-03	ENHB-45WE40-03	ENHB-60WE40-03	ENHB-120WE40-03
Packing Method	40 pcs / ctn	18 pcs / ctn	18 pcs / ctn	4 pcs / ctn	4 pcs / ctn
Packing Dimension (mm)	510x470x420	540x540x540	670x440x640	530x530x360	620x620x430
Net Weight/ Gross Weight (kg)	10.4/15.5	9.0/16.2	18.0/22.5	6.0/11.7	10.0/15.8